


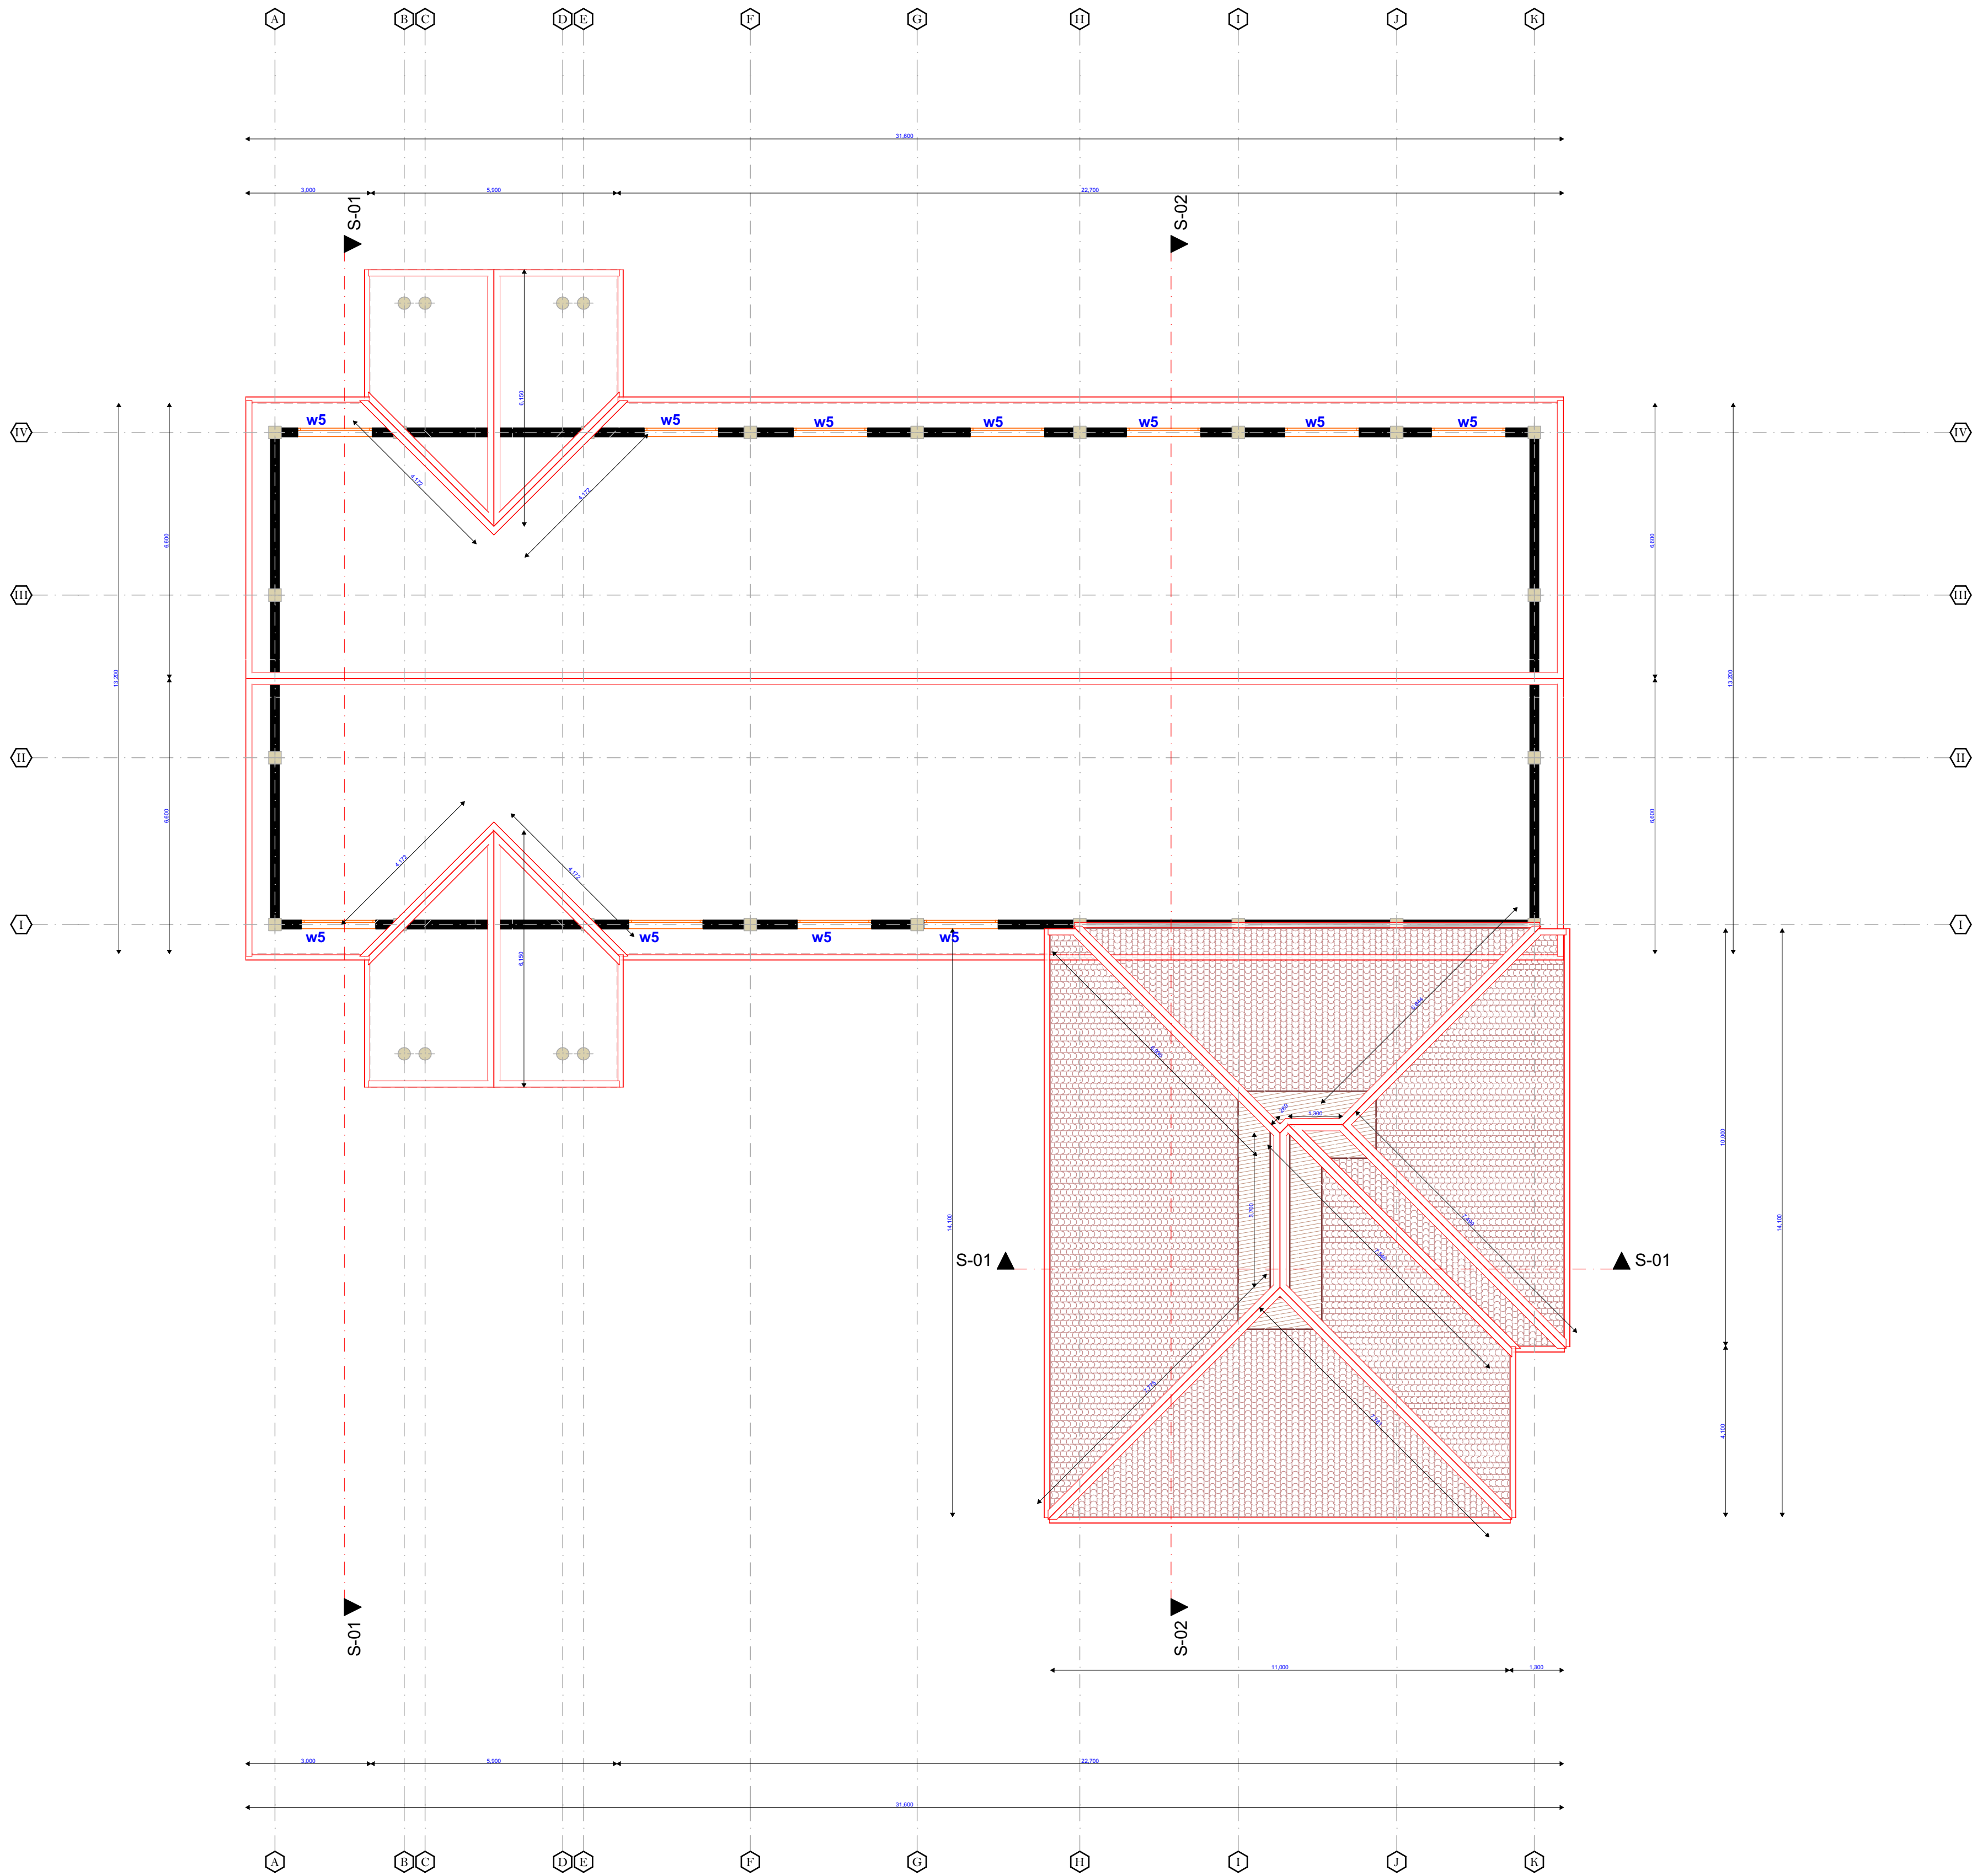

1. Story

1.

Story

1:100

NOTES

General

- Read only figured dimensions.
- All dimensions are in mm unless otherwise specified.
- The contractor must check and verify all dimensions before commencement of the work
- All windows and doors to have Permanent Vents (PV)

Structural

- For all R.C works, refer to S.E's details
- All walls less than 200mm thick to be reinforced with hoop iron at alternate courses
- All adjacent R.C work and masonry walls to be tied with strap irons at every course

Mechanical

- All plumbing and drainage works to comply with P. H specifications
- All surface ducts to be accessible from all floors
- S.V.P denotes soil vent pipe and to be provided at the head of the drainage

Electrical

- All conduits must be laid before plastering
- All electrical works to E.E's details

Fire Notes

- All exit doors should be well labelled and directions shown on all floors.
- Pressurized fire extinguishers should be installed of (9 litre 13A 55B Foam, 10litres 8Awater or 5kg 5A 134B C powder) or above.
- 5000 litres water tank or above plus a pressure pump to be installed for use incase of fire.

KEY

WINDOW SCHEDULES

DOOR SCHEDULES

W1 D1

W2 D2

W3 GD