REPUBLIC OF KENYA

KAPTARKOK PRIMARY SCHOOL

PROPOSED FIELD GRADING AND CIVIL WORKS AT KAPTARKOK PRIMARY SCHOOL

BILLS OF QUANTITIES

Procuring Entity: **KAPTARKOK PRIMARY SCHOOL**
P.O. Box 29-30700
ITEN
Telephone:
Website:
E-mail:

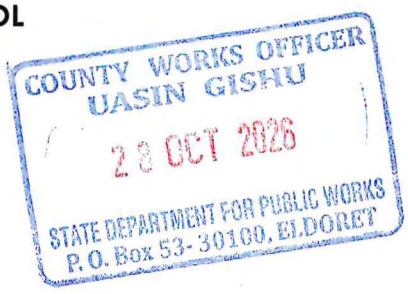

Prepared By: **Regional Works Office**
State Department for Public Works
P.O. Box 53-30100
ELDORET

OCTOBER 2026

PRELIMINARIES

ITEM	DESCRIPTION	UNIT	RATE	AMOUNT KSHS.
A	Allow a Provisional Sum Kenya Shillings One Hundred Thousand for Project Management Team	SUM	1	**100,000.00**
B	Allow % for Contractor's Profits and Overheads	%		
C	Allow a Provisional Sum of Kenya Shillings One Hundred Thousand for Material Testing as instructed by the Project Civil Engineer	SUM	1	**100,000.00**
D	Allow % for Contractor's Profits and Overheads	%		
	TOTAL CARRIED TO COLLECTION PAGE			

ITEM	DESCRIPTION	UNIT	CONT. QTY	RATE (KSH)	CONT. AMOUNT (KSH)
	PITCH 1				
	FOOTBALL PITCH				
	SITE CLEARANCE				
A	Clear the construction sites of all existing goal posts, bushes, shrub, vegetation, weeds, undergrowth, hedges and the like including cutting down trees of all girth sizes, grubbing up roots and removing from site as necessary	m2	9,800		
	EXCAVATION AND EARTHWORK				
B	Excavate to reduce levels starting from existing ground level: 600mm deep; including loading and carting away surplus excavated material as necessary	m3	5,880		
	Watering and maintenance				
C	Allow for watering, applying of top dressing manure, levelling,retouch planting, machine mowing and compacting to level for six months after planting	Item	1		
	FOOTBALL PITCH 2				
	SITE CLEARANCE				
D	Clear the construction sites of all existing goal posts, bushes, shrub, vegetation, weeds, undergrowth, hedges and the like including cutting down trees of all girth sizes, grubbing up roots and removing from site as necessary	m2	9,800		
	EXCAVATION AND EARTHWORK				
E	Excavate to reduce levels starting from existing ground level: 1500mm deep; including loading and carting away surplus excavated material as necessary	m3	14,700		
	Total for Element 2 Carried Forward to Summary				

					CONT. AMOUNT (KSH)
	SUMMARY				
	BILL NO. 2				
	EXTERNAL WORKS				Amount Kshs
1.0	FOOTBALL PITCH				

BILL NO:1 ACCESS ROAD AND PARKING

ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT KSHS.
	ACCESS ROAD				
A	Excavate over site to remove vegetation soil average 150mm deep.	SM	1,000		
B	Cut down tree and grub up roots for tree with girth not exceeding 500mm	No.	20		
C	Ditto n.e 1500mm	No.			
D	Excavate area of the road average 400 mm to formation level.	CM	400		
E	Extra over excavation for excavating in Rock class 1	CM	10		
F	Allow for trimming and compacting 300mm below formation level in two 150mm layers to correct levels and crossfalls. Compaction to 100% MDD	SM	1,000		
G	Allow a provisional sum for adjusting the Moisture Content of the 300mm below formation by either mixing in water or drying out the material such that the Moisture Content during compaction is between 75-100% OMC .	SUM	1		
H	Provide non selective post emergence broad spectrum persistent herbicide as 'Round up' or equal and approved; and, apply on the surface of the formation as per the manufacturer's specifications.	SM	1,000		
I	Provide, lay and compact 300mm thick Murram in layers of 150mm thick rolled to the sastisfaction of the Engineer/Project Manager.	CM	300		
J	Provide lay and compact 50mm thick sand or quarry dust bedding to receive heavy duty precast concrete paving blocks.	SM	1,000		
K	Provide, lay and compact 80mm thick Heavy duty Pre-cast Concrete paving blocks (Minimum Strength 45-50 N/mm²)	SM	1,000		
	KERBS AND CHANNELS FOR ACCESS ROADS AND PARKING BAYS				
	To be manufactured strictly in accordance with BS 340, Concrete grade to be C20/20) (Mix 1:2:4). Cement to BS 12, 20mm aggregate to BS 882				
L	Provide and place 450x100mm concrete bed and haunch in concrete grade C15 (mix 1:3:6) for Pre-Cast Concrete 250x125mm kerbs and125x100mm channels. Include for all necessary formwork as per Drawing detail (50)5332 'B'. Cement to BS 12, 20mm aggregate to BS 882.	CM	30		
M	Ditto but for Pre-Cast Concrete 250x125mm kerbs only.	CM	4		
N	Provide, lay and joint 250x125mm Pre-Cast Concrete kerbs and 125x100mm	LM	470		
O	Ditto 250x125mm radius kerbs.	LM	20		
P	Ditto pre-cast concrete 300x300x250mm quadrants.	no.	4		
	TOTAL CARRIED TO COLLECTION PAGE				

BILL NO:1 ACCESS ROAD AND PARKING

ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT KSHS.
	KERBS AND CHANNELS FOR ACCESS ROADS AND PARKING BAYS Cont.				
A	Ditto radii channel.	LM	0		
B	Load and cart away all surplus excavated material as instructed by the Engineer/Project Manager.	CM	100		
	FOOTHPATHS ADJACENT TO THE ACCESS ROADS AND EXTERNAL WALKWAYS				
C	Excavate over site to remove vegetation soil average 150mm deep.	SM	1,000		
D	Excavate area of the road average 150mm to formation level, trim and compact to correct levels and crossfalls.	SM	1,000		
E	Provide, lay and compact 150mm thick approved Murram base rolled to the satisfaction of the Engineer	CM	150		
F	Provide, lay and joint 600x600x50mm Pre-Cast Concrete slabs to Footpaths as instructed by the Engineer.	SM	0		
G	Provide all materials, mix, place and vibrate 475X200mm thick concrete bed and haunch in Concrete grade C15 (Mix Ratio 1:3:6) as instructed by the Engineer . Cement to BS 12, 20mm aggregate to BS 882.	CM	10		
	Carried to Collection……..				
	COLLECTION				
	Brought Forward from Page……..4				
	Brought Forward from Above…….				
	TOTAL CARRIED TO GRAND SUMMARY PAGE				

GRAND SUMMARY PAGE

ITEM	DESCRIPTION	AMOUNT (FOR CONTRACTOR'S USE ONLY)	AMOUNT (FOR OFFICIAL USE ONLY)
A	Brought forward from Preliminaries or Prelim.page 1……		
B	Football Pitch		
C	Brought forward from CIVIL Page 3……		
	SUB TOTAL		
	ADD 0.003% PPRA CAPACITY BUILDING LEVY		
	TOTAL CARRIED TO FORM OF TENDER		

CORRECTED TENDER AMOUNT (FOR OFFICIAL USE ONLY)

AMOUNT OF TENDER IN WORDS: KENYA SHILLINGS .....

.....

.....

TENDERER'S SIGNATURE AND STAMP.....

ADDRESS.....

DATE.....

COUNTY WORKS OFFICER
UASIN GISHU
28 OCT 2026
STATE DEPARTMENT FOR PUBLIC WORKS
P. O. Box 53- 30100, ELDORET

WITNESS TO TENDERER: NAME AND SIGNATURE.....

.....

DESCRIPTION.....

PIN. NO. ..... **V.A.T REG. NO.** .....

ADDRESS.....

DATE .....